



DATE	LET.	REVISION	NO.

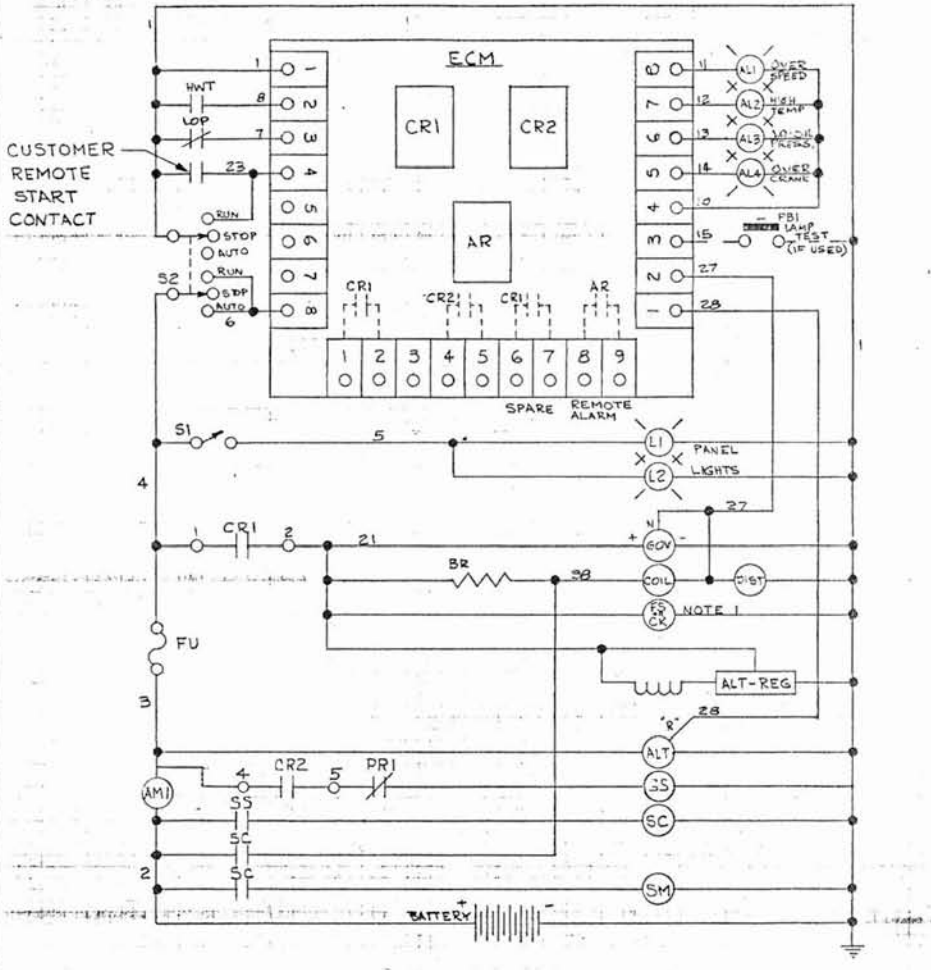

**LEGEND**

SYM	DESCRIPTION	SYM	DESCRIPTION
AL	ALARM LIGHT	GOV	GOVERNOR
ALT	ALTERNATOR	HWT	HI-WATER TEMPERATURE SW.
AM	AMMETER	L	LIGHT
AR	ALARM RELAY	LOP	LO-OIL PRESSURE SW.
BR	BALLAST RESISTOR	LWT	LO-WATER TEMPERATURE SW.
CK	CHOKE	PB	PUSHBUTTON
CR	CONTROL RELAY	S	SWITCH
ECM	ENGINE CONTROL MODULE	SC	STARTER CONTACTOR
FS	FUEL SOLENOID	SM	STARTER MOTOR
FU	FUSE	TB	TERMINAL BLOCK
		PR	PROTECTIVE RELAY
		SS	START SOLENOID

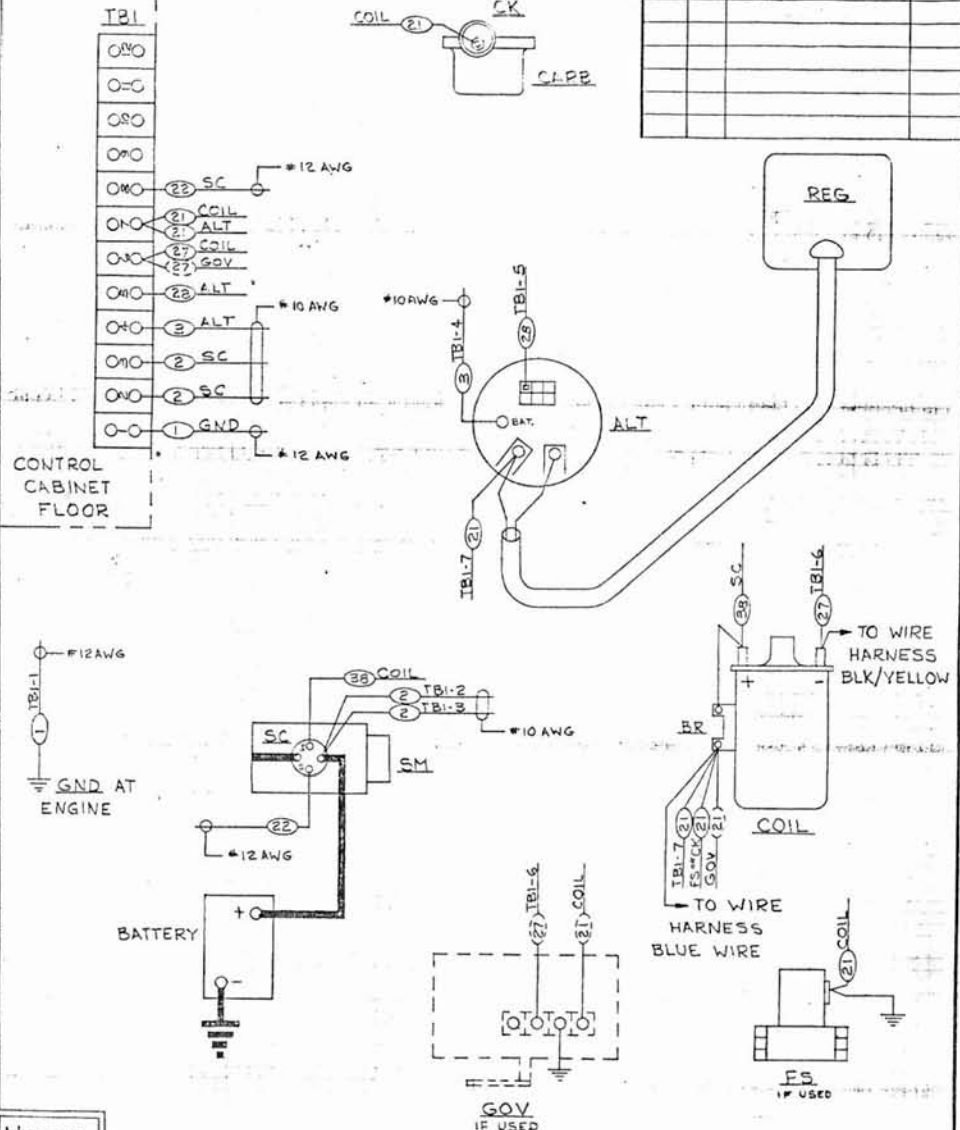

**NOTES:**

- 1) THE CK (CHOKE) IS USED ONLY ON GASOLINE MODELS. FS (FUEL SOLENOID) IS USED ONLY ON LPG OR NATURAL GAS MODELS.
- 2) EXCEPT AS NOTED, ALL WIRES TO BE \*16AWG.
- 3) COIL OF PRI IS 120 VAC. SEE A.C. WIRING DIAGRAM FOR DETAILS.

MACHINE LIMITS 2: 50 UNLESS OTHERWISE SPECIFIED

**WINGO**  
Division of Dyna Technology, Inc.  
DETROIT, MICHIGAN U.S.A.

TITLE: ENGINE CONNECTION / SCHEMATIC DIAGRAM, D.C.

MATERIAL: \_\_\_\_\_

DRAWN BY: <i>CS</i>	DATE: 10/22/82	SUPERSEDED BY:
CHECKED BY:	DATE:	SUPERSEDES:
APPROVED BY: <i>CS</i>	DATE:	SCALE:

PATTERN OR FORGING NO. \_\_\_\_\_ DRAWING NO. 71526-9