
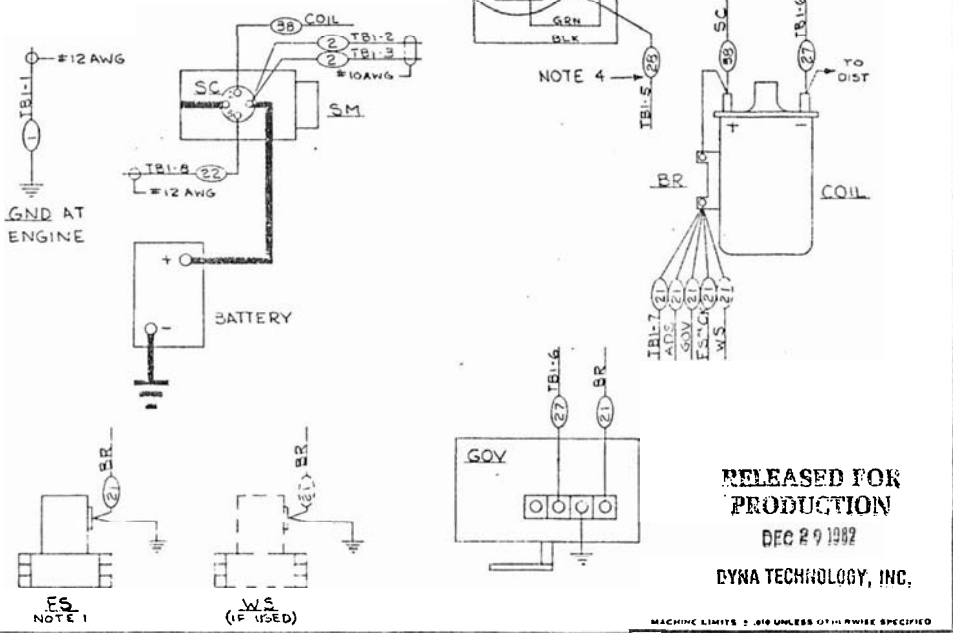


LEGEND		LEGEND	
SYM	DESCRIPTION	SYM	DESCRIPTION
AL	ALARM LIGHT	L	LIGHT
ALT	ALTERNATOR	LOP	LO-OIL PRESSURE SW.
AM	AMMETER	PB	PUSHBUTTON
AR	ALARM RELAY	PR	PROTECTIVE RELAY
BR	BALLAST RESISTOR	S	SWITCH
CK	CHOKE	SC	STARTER CONTACTOR
CR	CONTROL RELAY	SM	STARTER MOTOR
ECM	ENGINE CONTROL MODULE	SS	START SOLENOID
FS	FUEL SOLENOID	TB	TERMINAL BLOCK
FU	FUSE		
GOV	GOVERNOR		
HWT	HI-WATER TEMPERATURE SW.		

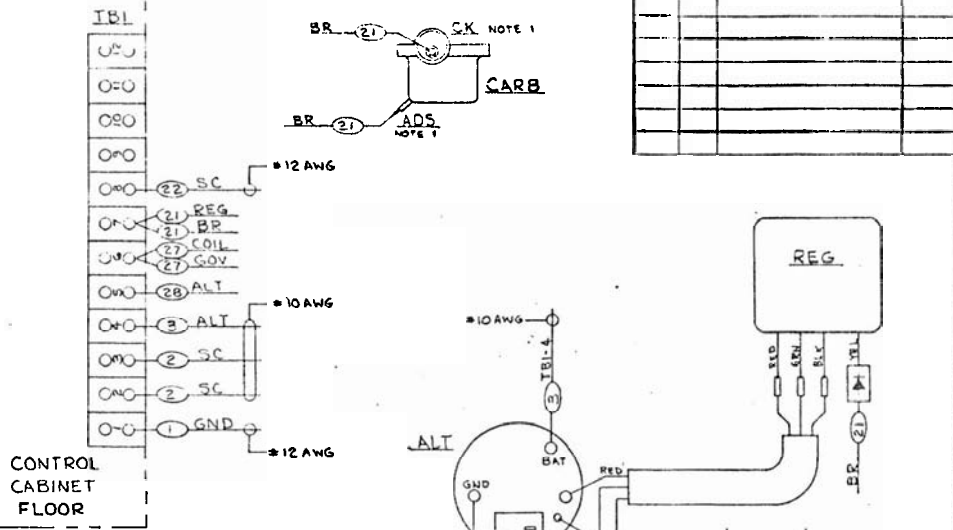

DATE	REV.	REVISION	NO.

RELEASED FOR PRODUCTION
 DEC 29 1982
 DYNA TECHNOLOGY, INC.

NOTES:
 1.) THE CK (CHOKE) IS USED ONLY ON GASOLINE MODELS. FS (FUEL SOLENOID) IS USED ONLY ON LPG OR NAT. GAS MODELS. ADS (ANTI DIESEL SOL.) IS USED WITH CK.
 2.) EXCEPT AS NOTED, ALL WIRES TO BE #16 AWG.
 3.) COIL OF PRI IS 120VAC, SEE AC. WIRING DIAGRAM FOR DETAILS.
 4.) SOLDER TO BACK OF EXPOSED DIODE, AVOID EXCESSIVE HEAT TO PREVENT DIODE DAMAGE.
 5.) WS IS USED ONLY WITH OPTIONAL COOLING SYSTEMS.

MACHINE LIMITS .2 .010 UNLESS OTHERWISE SPECIFIED

WINCO
 Division of Dyna Technology, Inc.
 DETROIT, MICHIGAN U.S.A.

TITLE: **ENGINE CONNECTION/DC SCHEMATIC DIAGRAM**

DRAWN BY: <i>ce</i>	DATE: 11/12/82	SUPP. SOLD BY:
CHECKED BY:	DATE:	SUPP. ISSUES BY:
APPROVED BY:	DATE:	SCALE:
PATTERN OR FORGING NO.:	DRAWING NO.:	

93114-1