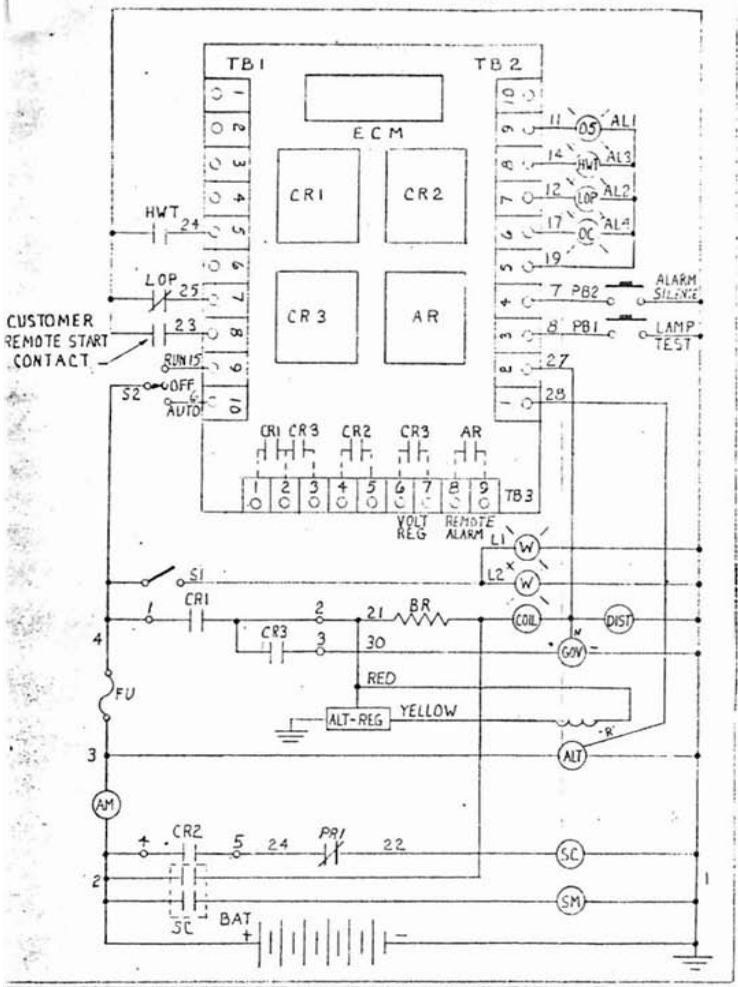

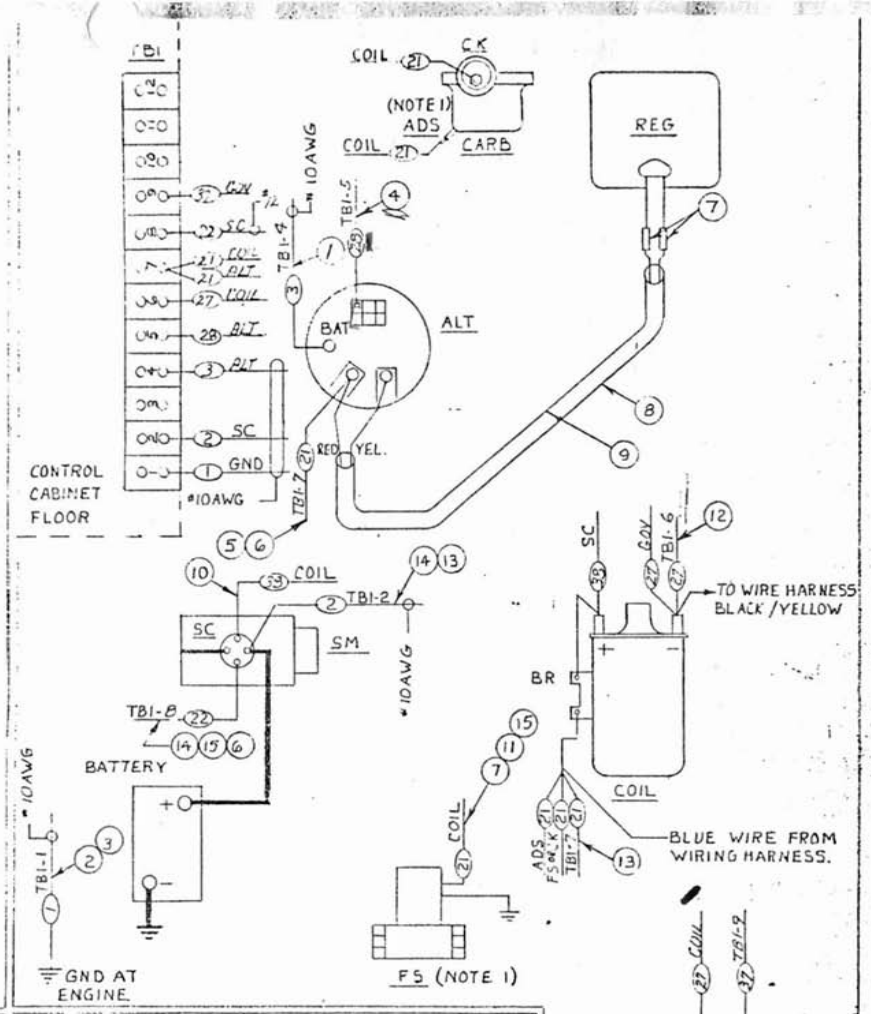

SYM	DESCRIPTION	SYM	DESCRIPTION
ADS	ANTI-DIESEL SOLENOID	FU	FUSE
AL	ALARM LIGHT	HWT	HI WATER TEMP.
ALT	ALTERNATOR	L	LIGHT
AM	AMMETER	LOP	LOW OIL PRESSURE
AR	ALARM RELAY	OS	OVER SPEED
BR	BALLAST RESISTOR	S	SWITCH
CK	CHOKE	SC	STARTER CONTACTOR
CR	CONTROL RELAY	SM	STARTER MOTOR
ECM	ENGINE CONTROL MODULE	TB	TERMINAL BLOCK
FS	FUEL SOLENOID	TD	TIME DELAY RELAY

NOTES:

1. ADS (ANTI-DISEL SOLENOID) AND CK (CHOKE) ARE USED ONLY ON GASOLINE MODELS. FS (FUEL SOLENOID) IS USED ONLY ON LPG OR NAT. GAS MODELS.
2. EXCEPT AS NOTED ALL WIRES TO #16 GA

RELEASED FOR PRODUCTION

NOV 17 1982

DYNA TECHNOLOGY, INC.

ISSUE	REVISION	DATE	BY	AUTH.
3	# WAS 93651 ADDED PRI	10-28-82	DW	AL
2	REVISED WIRING N3 CN	9-21-82	LA	RN
1	ORIGINAL	—	—	—

DETAILS	ITEM	PART NO.	QUAN.	NAME	DETAILS

ALL DIMENSIONS GIVEN IN INCHES—WORK TO DIMENSIONS—DO NOT SCALE—SAMPLES MUST BE APPROVED BY DYNA TECHNOLOGY ENGINEERING DEPT BEFORE PROCEEDING WITH PRODUCTION
— TOLERANCES (UNLESS OTHERWISE SPECIFIED): FRACTIONS ± 1/64
DECIMALS ± .005 PUNCHED HOLES ± .004 — .000 ANGLES ± 1°

DRAWN BY	DATE	CH'KD BY	DATE	APPR'D BY	DATE	SCALE
D.M.W.	12-22-81	LA	12-22-81	RN	12-28-81	—

MATERIAL
FINISH
ASSY D-92844
MODEL 75 CH

D.C. SCHEMATIC / ENGINE CONTROL DIAGRAM

WINDO Division of DYNA TECHNOLOGY, INC. LeCenter, MN 56057

C-93651-2