
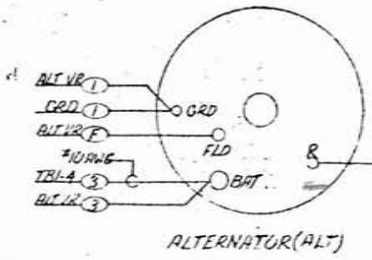





SYM	DESCRIPTION
AL	ALARM LIGHT
ALT	ALTERNATOR
AM	AMMETER
AR	ALARM RELAY
CB	CIRCUIT BREAKER
CK	CHOKE
CR	CONTROL RELAY
ECM	ENGINE CONTROL MODULE
FS	FUEL SOLENOID

SYM	DESCRIPTION
HWT	HIGH WATER TEMP. SW.
L	LIGHT
LOP	LOW OIL PRESS. SW.
PB	PUSH BUTTON
PR	PROTECTIVE RELAY
S	SWITCH
SC	STARTER CONTACTOR
SM	STARTER MOTOR
S3	START SOLENOID
TB	TERMINAL BLOCK

- NOTE:
- 1) THE CHOKE (CK), FUEL PUMP AND ANTI-DIESELING SOLENOID, ARE USED ON GASOLINE MODELS ONLY. FUEL SOLENOID (FS) IS USED ON LPG OR NATURAL GAS UNITS
 - 2) ALL WIRES TO BE #14 AWG, EXCEPT AS NOTED.
 - 3) COIL OF PK1 IS 120VAC, SEE AC WIRING DIAGRAM FOR DETAILS.



RELEASED FOR PRODUCTION
SEP 10 1995

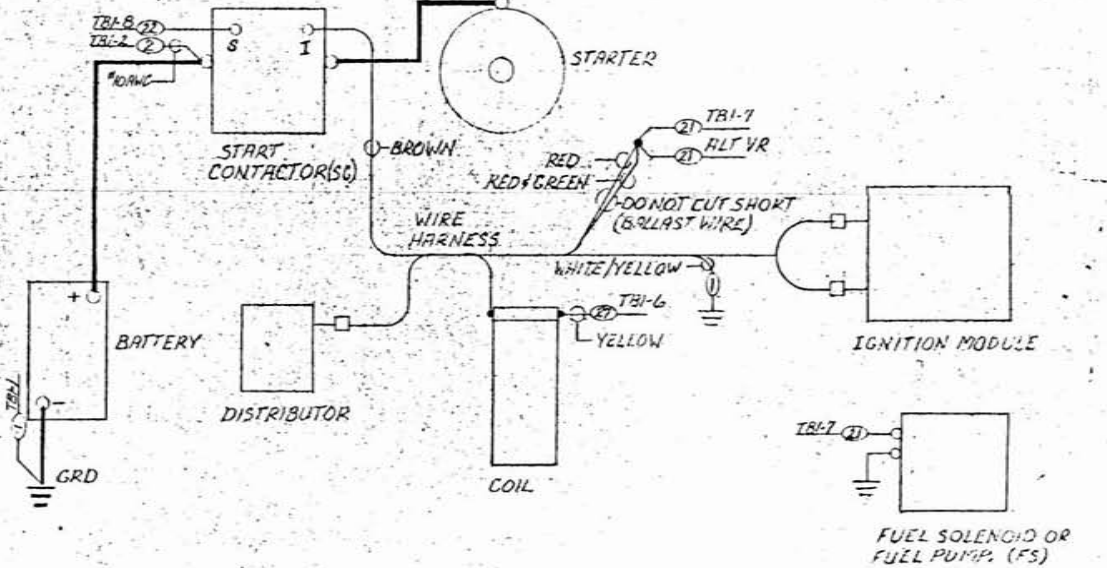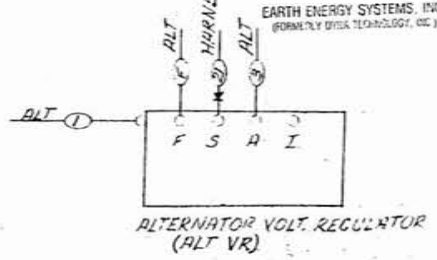

ALL DIMENSIONS GIVEN IN INCHES - WORK TO DIMENSIONS - DO NOT SCALE - SAMPLES MUST BE APPROVED BY DYNA TECHNOLOGY ENGINEERING DEPT. BEFORE PROCEEDING WITH PRODUCTION.			
- TOLERANCES (UNLESS OTHERWISE SPECIFIED): FRACTIONS ± 1/64 DECIMALS .005 PUNCHED HOLES ± .004 - .006 ANGLES ± 1°			
DRAWN BY	DATE	CHECKED BY	DATE
LA	1-20-83	RL	2/2/83
APPROVED BY	DATE	SCALE	
RL	1-20-83		
MATERIAL			
FINISH			
PART NO. 094353			
MODEL 315FS			
ENGINE CONNECTION I SCHEMATIC			
DYNALOOK			
Le Center, MN 56307			