


15	91958	1	ADAPTER	
14	61898	4	90° LUG	
13	456	1	NUT	#10-24
12	484	1	LOCK WASHER	#10 SPLIT
11	598	1	FLAT WASHER	#10
10	A-420-1	1	RHMS	#10-24 X 3/4
9	B-82096	60*	WIRE	#20 RED
8	81963	1	LUG	
7	48602-23	1	LUG	
6	81964	22	LUG	
5	59944-2	1	RELAY	12 VDC
4	59944-1	1	RELAY	120VAC
3	B-48039-10	1	CABLE CLAMP	
2	D-95699-5	1	WIRE HARNESS	
1	D-95699-1	1	CONTROL PANEL ASSEMBLY	

CONTROL RELAY TERMINATION (LOCATED ON REAR OF CONTROL CABINET)

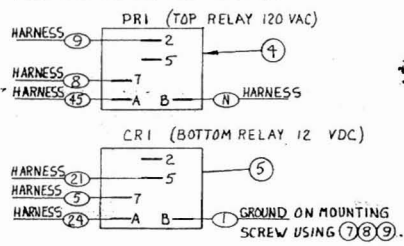

- NOTES:
1. DASHED LINES INDICATE WIRE HARNESS ROUTING.
  2. ALL WIRES NOT ADDRESSED TO 'HARNESS' ARE TO BE WIRED "POINT TO POINT" USING ITEMS (6) AND (7).
  3. USE ITEM (H) WHERE NOTED. DOUBLE OR TRIPLE LEAD WIRE IN LUG WHERE REQ'D FOR A POSITIVE CRIMP.

95703-1

3 (2) WAS D-95699		CRP-34	6/19/89 D.W.
2 ADDED (5) REVISED START CIRCUIT ON S1		3/12/85 D.W.	
1 ORIGINAL			

APPROVED BY: *[Signature]* DATE: 10-17-84

MATERIAL: *[Blank]*

DATE: 12-4-81

D.C. WIRING HARNESS TERMINATION