MISOFPTOS

Features

Low Harmonic Content

Provides clean power for both farm and home.

Cast Iron Gearcase with Helical Gears

A 1000 RPM gearcase designed, engineered, and manufactured in house.

Premium Square D Circuit Breakers

Square D is the industry leader in circuit breaker protection.

Frequency Meter

A large 3 1/2" frequency meter ensures the proper output.

Protective PTO Shield

Safety is always a priority.


100% Load Tested

You won't find statistical sampling here. We load test every generator before it leaves our facility.

POWER TAKE-OFF

150,000 Continuous Watts



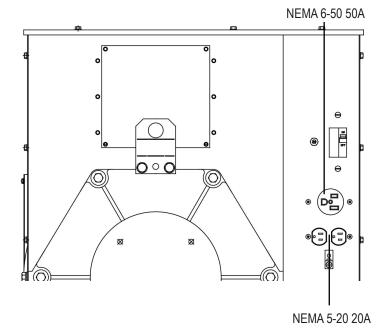

Optional Accessories

PTO Drive Shaft

1 3/4" - 20 spline x 1 3/4" - 20 spline or 1 3/4" - 20 spline x 1 3/8" - 21 spline quick connect shafts. Designed to handle the horsepower ratings required.

Off-Road PTO Trailer

Our steel trailers are specifically designed to handle the torque of running a PTO generator.

Manual Transfer Switch

Set up your generator quickly and safely to restore power to critical circuit breakers.

SPECIFICATIONS W150FPTOS

W150FPT0T

| CONTINUOUS WATTS | 150,000 |
|-----------------------|--------------------|
| AMPS ⁽¹⁾ | 625 |
| OUTPUT | 120/240 V |
| PHASE | SINGLE |
| PTO INPUT SPEED | 1000 RPM |
| INPUT SHAFT SIZE | 1 3/4" - 20 SPLINE |
| REQUIRED INPUT HP(2) | 300 |
| MOTOR STARTING(3) | 75 HP |
| FREQUENCY METER | YES |
| MAIN CIRCUIT BREAKER | 600 AMP |
| BONDED NEUTRAL | YES |
| GROUND LUG | YES |
| GEARCASE OIL | SAE 85W 90-140 |
| GEARCASE OIL CAPACITY | 2.75 PINTS |
| LIFTING EYE | YES |
| WARRANTY | 3 YRS |

NOTES: (1) Unity (1.0) power factor (2) Required HP at PTO of tractor for full rated output. Each 2 HP of tractor power equals approximately 1 kW of electric power. (3) Code G capacitor start motor. Please consult factory or authorized dealer for further information.

GENERATOR END


| VOLTAGE REGULATION | +/- 5% |
|---------------------------|-----------------------|
| TOTAL HARMONIC DISTORTION | < 8% |
| RATING | 150° C |
| TYPE | 4 POLE ROTATING FIELD |
| BRUSHED | NO |
| GENERATOR SPEED | 1800 RPM |
| VOLTAGE CONTROL | AVR AS440 |
| INSULATION | CLASS H |

RECEPTACLES

| 120 VOLT RECEPTACLES | (1) NEMA 5-20 20A DUPLEX |
|----------------------|--------------------------|
| 240 VOLT RECEPTACLES | (1) NEMA 6-50 50A |

SHIPPING

| DIMENSIONS (LxWxH) | 46.9" x 27" x 30.4" |
|---------------------|----------------------|
| NET WEIGHT | 1474 LBS |
| SHIPPING DIMENSIONS | 55.25" x 28.5" x 36" |
| SHIP WEIGHT | 1484 LBS |
| FREIGHT CLASS | 65 |

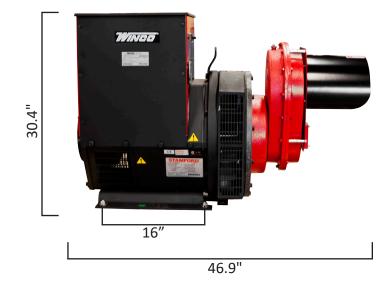



Specifications are subject to change without notice.
225 S. Cordova Ave Le Center MN • 1-800-733-2112 • www.wincogen.com