

## Features

### Briggs & Stratton Vanguard Engine

Premium-grade Vanguard engines are application-engineered to power equipment that works for a living.

### Low Oil Protection

In the event there is low-oil level, the engine will shut down, which will protect the engine from damage.

### Powder Coat Paint

For an incredibly durable finish.

### Sturdy Wrap-Around Welded Tubular Cradle

We use 14 gauge steel to provide industrial strength support.

### 15 Gallon Fuel Tank

The EPA approved steel fuel tank design eliminates hydrocarbon emissions.

### Premium Square D Circuit Breakers

Providing clear and instant identification of a tripped circuit with a Visi-Trip indicator.

### 100% Load Tested

You won't find statistical sampling here. We load test every generator before it leaves our facility.

## INDUSTRIAL




**18,000 Starting Watts**  
**15,000 Running Watts**



NEMA 5-20R 20A

NEMA 14-60R 60A

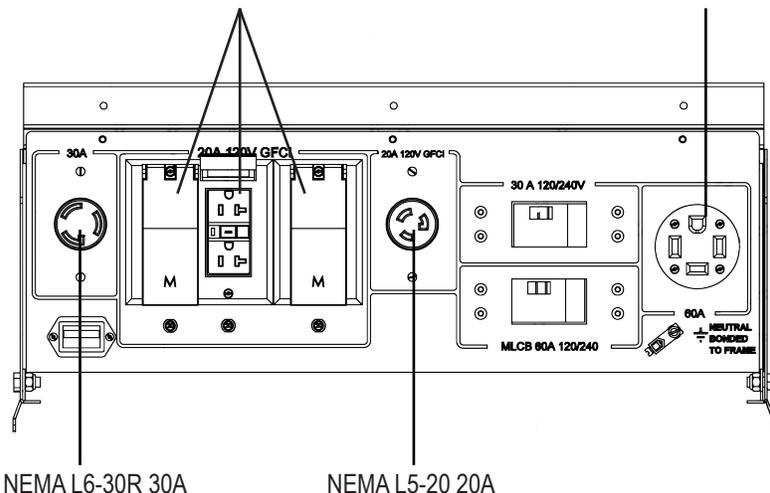

## Optional Accessories

### Four Wheel, Flat-Free Dolly Kit

Portability is important to get your generator where it needs to be.

### Generator Cover

When your generator is not in use, you will want to keep it dust and debris free.

### Plug-In Line Voltage Monitor

For when you want to verify the voltage output.

### 60 Amp (NEMA 14-60P) Plug

You supply the cord you need. We offer the plug.

### Maintenance Kit

Keep the engine at its peak performance to ensure the generator will be ready when needed most.

### Battery

Interstate group 26 500 CCA

## GENERATOR

STARTING WATTS	18,000
RUNNING WATTS	15,000
RUNNING AMPS @ 120 VAC	125
RUNNING AMPS @ 240 VAC	62.5
VOLTAGE REGULATION	CAPACITOR +/-5%
FREQUENCY REGULATION	+/-3%
MAIN CIRCUIT BREAKER	60 AMP, 240 VAC
BONDED NEUTRAL	YES
120 VOLT RECEPTACLES	(3) NEMA 5-20R 20A (GFCI) (1) NEMA L5-20 20A (GFCI)
120/240 VOLT RECEPTACLES	(1) NEMA 14-60R 60A
240 VOLT RECEPTACLES	(1) NEMA L6-30R 30A (GFCI)
GENERATOR WARRANTY <sup>(1)</sup>	2 YRS COMMERCIAL

NOTES: (1) For more generator warranty information contact your local WINCO dealer.

## GENSET

MOTOR STARTING (CODE G) <sup>(1)</sup>	6 HP
SOUND DATA <sup>(2)</sup> FULL LOAD	79
LIFTING EYE	INCLUDED
4-WHEEL DOLLY KIT	OPTIONAL
PROTECTIVE ROLL FRAME	14 GAUGE STEEL
ASSEMBLED IN	USA
EPA APPROVED	YES
CARB APPROVED	NO
CSA APPROVED	NO

UNIT WARRANTY<sup>(3)</sup> 2 YEARS COMMERCIAL  
 NOTES: (1) Code G capacitor start motor. (2) All measurements are in db(a). Tested at 7 meters (23 ft.). (3) For more generator warranty information contact your local WINCO dealer.

## ENGINE

ENGINE BRAND	BRIGGS & STRATTON
ENGINE MODEL	VANGUARD
ENGINE STARTER	ELECTRIC
ENGINE SPEED	3600 RPM
ENGINE CYLINDERS	V-TWIN
DISPLACEMENT/TYPE	895 CC / OHV
LOW OIL PROTECTION	STANDARD
RECOMMENDED OIL <sup>(1)</sup>	10W-30
OIL CAPACITY	2.1 QT
FUEL TANK	15 GAL
FUEL GAUGE	YES
FULL LOAD RUN TIME	7 HOURS
TIME METER	YES
BATTERY SIZE <sup>(2)</sup>	BCI GROUP 26 500 CCA
ENGINE WARRANTY <sup>(3)</sup>	3 YRS COMMERCIAL

NOTES: (1) The oil recommended is for normal applications. See operator's manual for the recommended oil for your needs. (2) Battery not included (3) Contact your local Briggs & Stratton service center for engine warranty assistance.

## DIMENSIONS




DIMENSIONS	40" x 26.6" x 26.2"
DIMENSIONS W/ WHEEL KIT	44.6" x 36" x 33"
NET WEIGHT	442 LBS

NOTES: Dimensions are L x W x H.

## SHIPPING

SHIPPING DIMENSIONS	50" x 27" x 32"
SHIP WEIGHT	489 LBS
FREIGHT CLASS	70

NOTES: Dimensions are L x W x H.

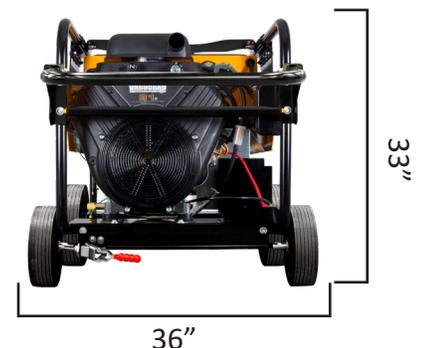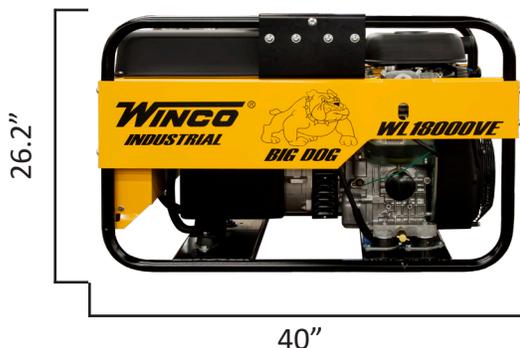

Specifications are subject to change without notice.