

Guest 2708A

Fully automatic 5-Stage, IP67, 5 amp 100% fresh and saltwater waterproof and shock resistant, on-board marine battery charger. Built in safety includes reverse polarity, over-current, over-temperature, and ignition protection.



GUEST 2708A

SENS Micro Genius LE-2405

Uses a patented microprocessor control delivers fast and safe charging. Safety features include water and dust protection, battery and charger status LED, and superior efficiency and cooling.



SENS LE-2405

Guest 2707A

Fully automatic 5-Stage, 8 amp, IP67 100% fresh and saltwater waterproof and shock resistant, on-board marine battery charger. Built in safety includes reverse polarity, over-current, over-temperature, and ignition protection.



GUEST 2707A


DSEBC2410Ei

Designed to work with multiple battery types. This model can be used as a battery charger, power supply, or both, and multiple chargers can be installed in parallel. Analog voltmeter and ammeter along with LCD display allow easy monitoring of the charging system. A battery failure contact is linked to the digital genset controller to indicate a loss of power to charger. This charger is required for NFPA110 applications.




DSEBC210Ei


2708A

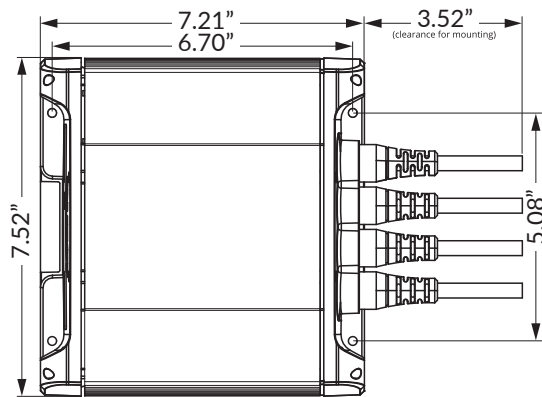

Fully Automatic 5-Stage Performance

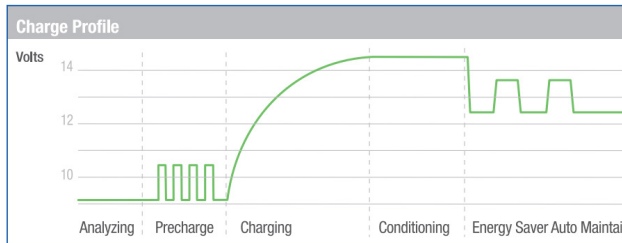


LED Display

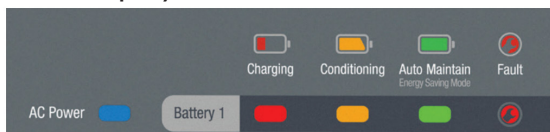


Guest 2708A

Voltage	12V DC
Amps	5
Input AC Voltage	90-135V 50/60Hz
Operating Temp Range	-10° C thru +50° C
Banks	1
Amps Per Bank	5
AC & DC Cord Length	6 FT
Housing Material	Extruded Aluminum
Connections	NEMA 5-15 AC Plug DC Ring Terminals
Battery Type	12V Flooded & AGM
Protections	Over Voltage Over Current Reverse Polarity Over Temp Ignition Protection
Ingress Protection	IP67 100% Waterproof
Energy Saving	Yes, 5-Stage
Monitor Display	LED indicator
Fault Detection	Yes
Warranty	2 Yrs


2707A

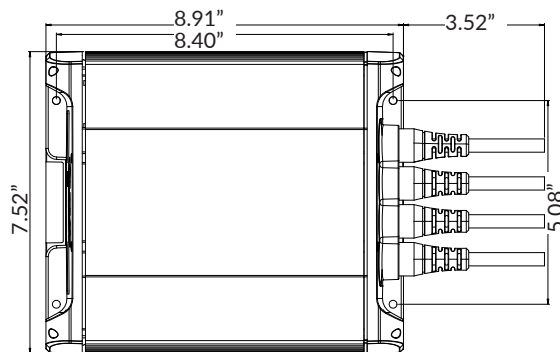

Fully Automatic 5-Stage Performance

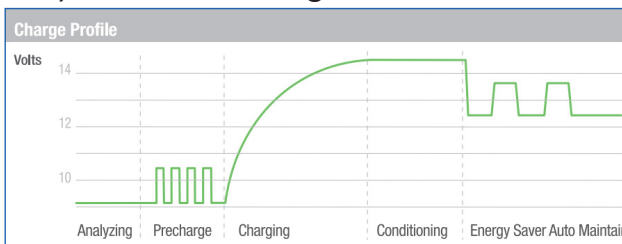


LED Display

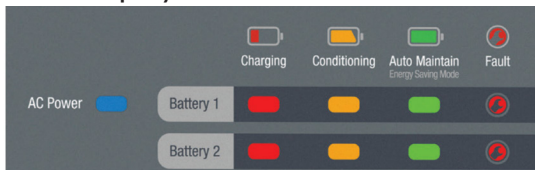


Guest 2707A

Voltage	12/24V DC
Amps	8 (4/4)
Input AC Voltage	90-135V 50/60Hz
Operating Temp Range	-10° C thru +50° C
Banks	2
Amps Per Bank	4
AC & DC Cord Length	6 FT
Housing Material	Extruded Aluminum
Connections	NEMA 5-15 AC Plug DC Ring Terminals
Battery Type	12V Flooded & AGM
Protections	Over Voltage Over Current Reverse Polarity Over Temp Ignition Protection
Ingress Protection	IP67 100% Waterproof
Energy Saving	Yes, 5-Stage
Monitor Display	LED indicator
Fault Detection	Yes
Dimensions (L x D x H)	8.9" x 2.4" x 7.5"


LE 2405

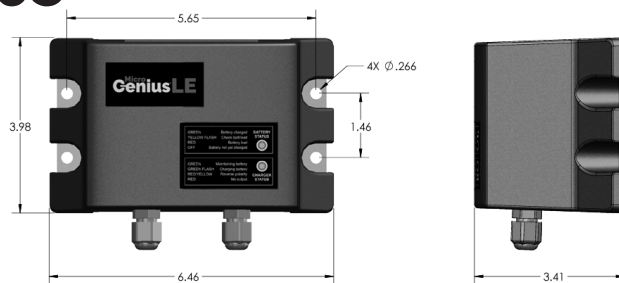

Fully Automatic Performance

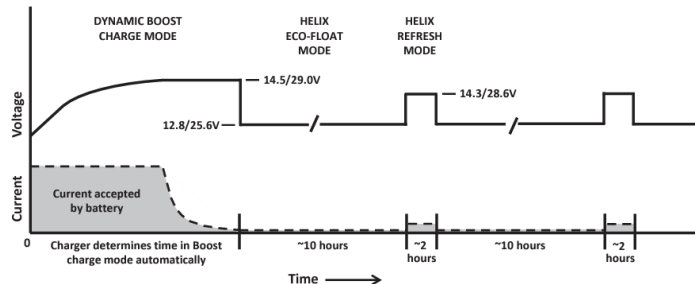

LED Display




SENS LE 2405

Voltage	24V DC
Input AC Voltage	80-140VAC 44-66 Hz
Operating Temp Range	-24° C thru +40° C
AC & DC Cord Length	6 FT
Housing Material	Aluminum/Plastic
Connections	NEMA 5-15 AC Plug DC Ring Terminals
Battery Type	24V Flooded & AGM
Protections	Dynamic Boost Reverse Polarity Cooling
Ingress Protection	IP67
Energy Saving	Yes
Monitor Display	LED Indicator
Fault Detection	Yes
Dimensions (L x D x H)	6.46" x 3.41" x 3.98"

DSEBC2410Ei

LCD Display

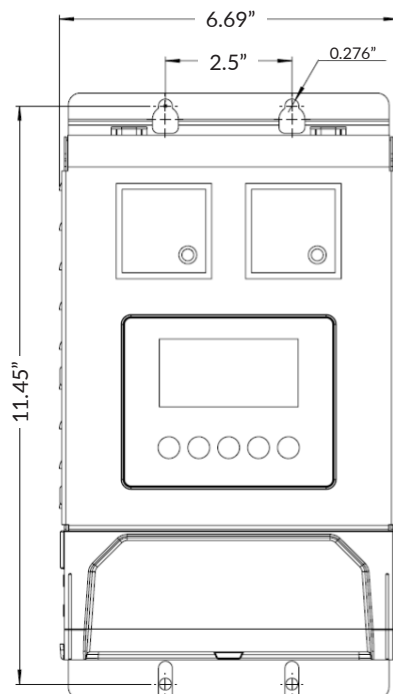

DSEBC2410Ei

Voltage	12/24V DC
Amps	10
Input AC Voltage	90-305V 48-64Hz
Operating Temp Range	-22° C thru +176° F
Temp Sensor Input	PT1000
Charge Failure Relay	3A @ 30V DC
Housing Material	Metal
Battery Type	12/24V
Protections	Over Voltage Over Current Short Circuit Reverse Polarity Over Temp Battery Charger Failure
Energy Saving	Yes, Eco-Power
Compliance	NFPA 110
Monitor Display	LCD Display
Fault Detection	Yes
Dimensions (L x D x H)	6.69" x 4.6" x 12"