

## Features

### Non-Fusible

Manually connect or disconnect the load from the source.

### Double Throw Switch

Visible blades for positive indication that the switch is ON or OFF.

### UL Listed

Suitable for use as service equipment.

### NEMA 3R Outdoor Enclosure


Corrosion resistant, baked enamel for an incredibly durable finish.

### Tangential Knockouts


Eliminate the need for conduit offsets or bends.

## SPECIFICATIONS

MODEL	VOLTS	POLES	AMPS	ENCLOSURE	DIMENSIONS (H x W x W/H x D)	SHIPPING WEIGHT (lbs)
64863-005	240	2	100	NEMA 3R	30.5" x 10.25" x 12" x 6.93"	36
64863-009	240	3	100	NEMA 3R	30.5" x 10.25" x 12" x 6.93"	40
64863-006	240	2	200	NEMA 3R	32.5" x 20.63" x 24" x 10.63"	70
64863-008	240	3	200	NEMA 3R	32.5" x 24.5" x 26.25" x 10.63"	80
64863-010	480	3	200	NEMA 3R	32.5" x 20.63" x 24" x 10.63"	80

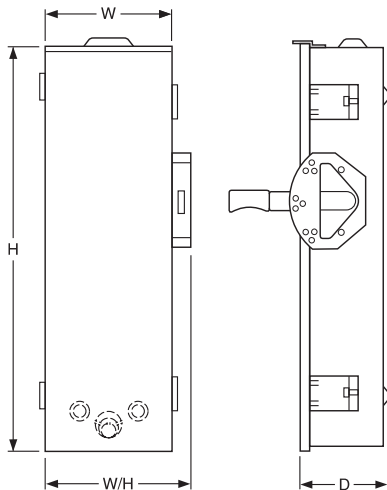

100 AMP

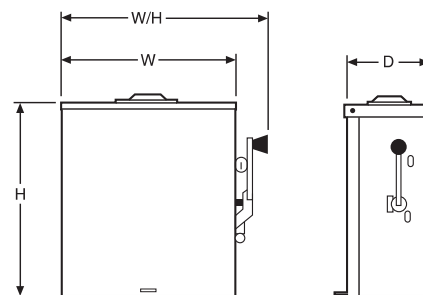

200 AMP