

STAMFORD®

S0L1-P1 Winding 311

S0L1-P1 - Technical Data Sheet

Standards

Stamford industrial alternators meet the requirements of IEC EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System	
AVR Type	AVR Power
AS540	Self-Excited
Voltage Regulation	± 1%

STAMFORD®

SOL1-P1 Winding 311

Electrical Data

Electrical Data	
Insulation System	Class H
Stator Winding	Double Layer Concentric
Winding Pitch	Two Thirds
Winding Leads	12
Winding Number	311
Number of Poles	4
IP Rating	IP23
RFI Suppression	EN 61000-6-2 & EN 61000-6-4, refer to factory for others
Waveform Distortion	NO LOAD < 2.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%
Short Circuit Ratio	1/Xd
Steady State X/R Ratio	N/A
50 Hz	
Telephone Interference	THF<2%
Voltage Series Star	380/220 400/231 415/240 440/254 416/240 440/254 460/266 480/277
Voltage Parallel Star	190/110 200/115 208/120 220/127 208/120 220/127 230/133 240/138
Voltage Series Delta	220/110 230/115 240/120 254/127 240/120 254/127 266/133 277/138
kVA Base Rating (Class H)	13.7 15 15 N/A 15.8 16.8 N/A 18

Saturated Values in Per Unit at Base Ratings and Voltages

Xd Dir. Axis Synchronous	2.115	2.090	1.942		2.443	2.322		2.090
X'd Dir. Axis Transient	0.119	0.117	0.109		0.137	0.130		0.117
X" ^d Dir. Axis Subtransient	0.109	0.108	0.100		0.126	0.120		0.108
Xq Quad. Axis Reactance	1.378	1.362	1.265		1.591	1.512		1.362
X" ^q Quad. Axis Subtransient	0.187	0.185	0.172		0.216	0.206		0.185
XL Stator Leakage Reactance	0.070	0.069	0.064		0.081	0.077		0.069
X2 Negative Sequence Reactance	0.215	0.212	0.197		0.248	0.236		0.212
X0 Zero Sequence Reactance	0.013	0.013	0.012		0.015	0.014		0.013

Unsaturated Values in Per Unit at Base Ratings and Voltages

Xd Dir. Axis Synchronous	2.539	2.508	2.330		2.931	2.786		2.508
X'd Dir. Axis Transient	0.137	0.135	0.125		0.158	0.150		0.135
X''d Dir. Axis Subtransient	0.127	0.126	0.117		0.147	0.140		0.126
Xq Quad. Axis Reactance	1.419	1.403	1.303		1.639	1.558		1.403
X''q Quad. Axis Subtransient	0.225	0.222	0.206		0.260	0.247		0.222
XL Stator Leakage Reactance	0.079	0.078	0.072		0.091	0.086		0.078
X2 Negative Sequence Reactance	0.258	0.254	0.236		0.297	0.283		0.254
X0 Zero Sequence Reactance	0.015	0.015	0.014		0.018	0.017		0.015

Time Constants (Seconds)

T'd TRANSIENT TIME CONST.	0.014
T''d SUB-TRANSTIME CONST.	0.001
T'do Q.C. FIELD TIME CONST.	0.394

STAMFORD®

S0L1-P1 Winding 311


Resistances in Ohms (Ω) at 22°C		
Stator Winding Resistance (Ra)	0.641 Ω per phase series star connected	
Rotor Winding Resistance (Rf)	0.509 Ω	
Exciter Stator Winding Resistance	17.638 Ω	
Exciter Rotor Winding Resistance	0.101 Ω per phase	
Positive Sequence Resistance (R1)	0.801 Ω	
Negative Sequence Resistance (R2)	0.923 Ω	
Zero Sequence Resistance (R0)	0.801 Ω	
Aux Winding Resistance	N/A	
Mechanical data		
Cooling Air	0.058 m ³ /sec (50Hz)	0.07 m ³ /sec (60Hz)
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation.	
Bearing	Single Bearing	
Weight Complete Alternator	90.3 kg 35.5 kg 31.4 kg 0.077 kgm ² 129 kg	
Weight Wound Stator		
Weight Wound Rotor		
Moment of Inertia		
Shipping weight in a Crate		
Packing Crate Size	930X590X760 mm	
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	N/A	
Bearing Non-Drive End	Ball Bearing, 6305-2RS1	

STAMFORD®






S0L1-P1 Winding 311

Three Phase Efficiency Curves

50Hz Curves


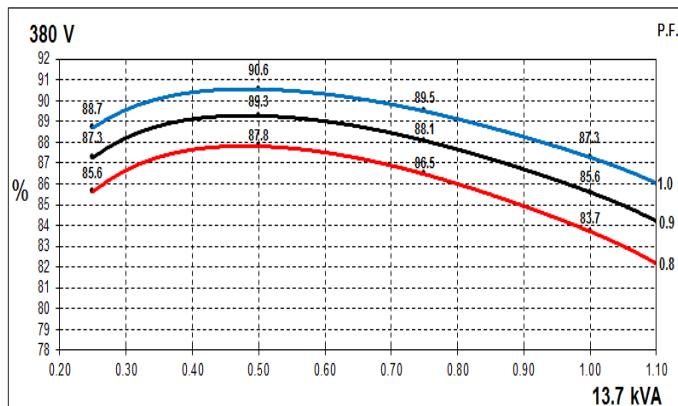


60Hz Curves

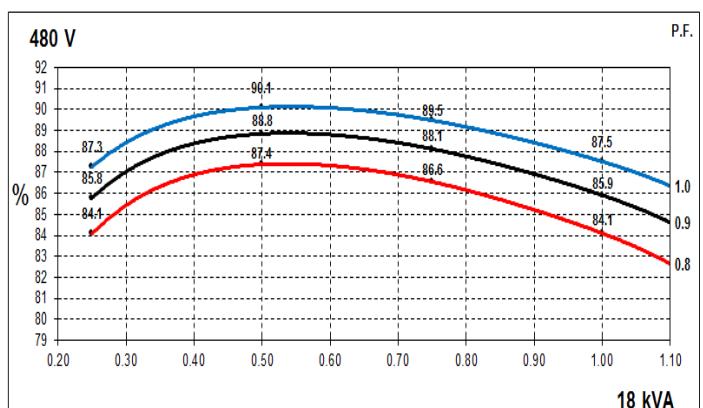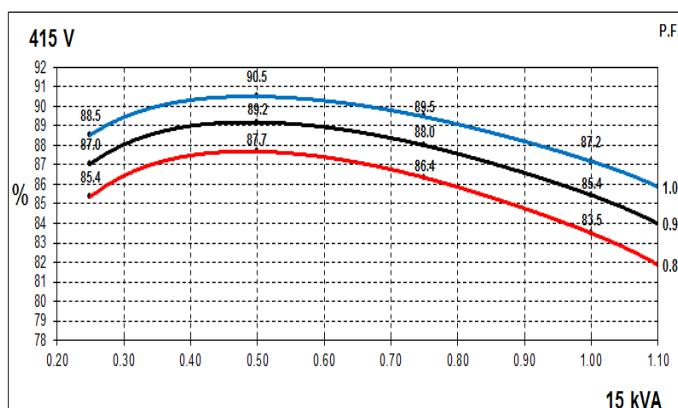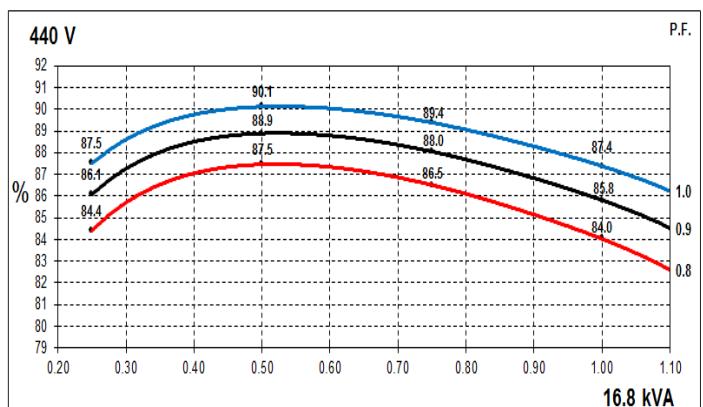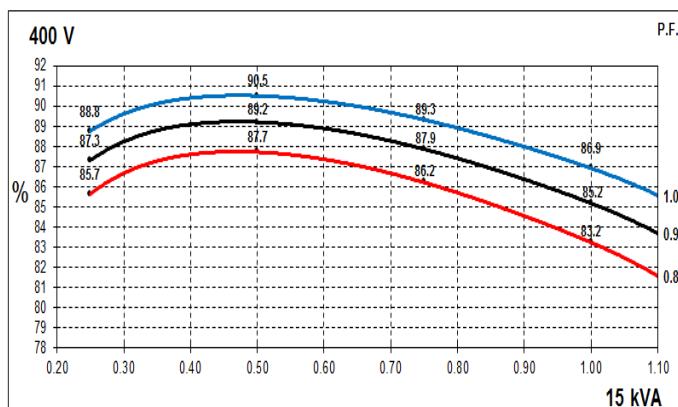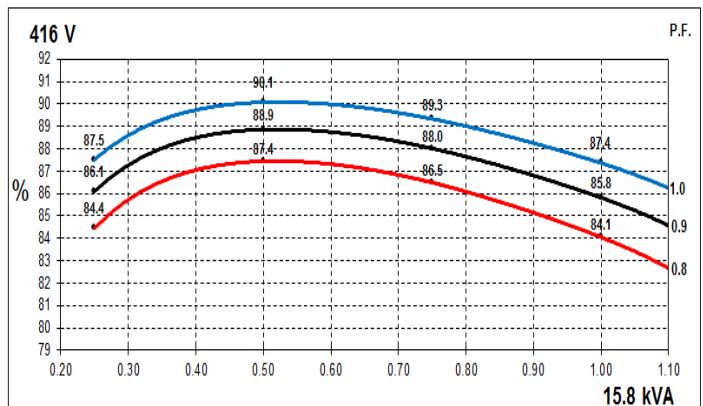



STAMFORD®

S0L1-P1 Winding 311

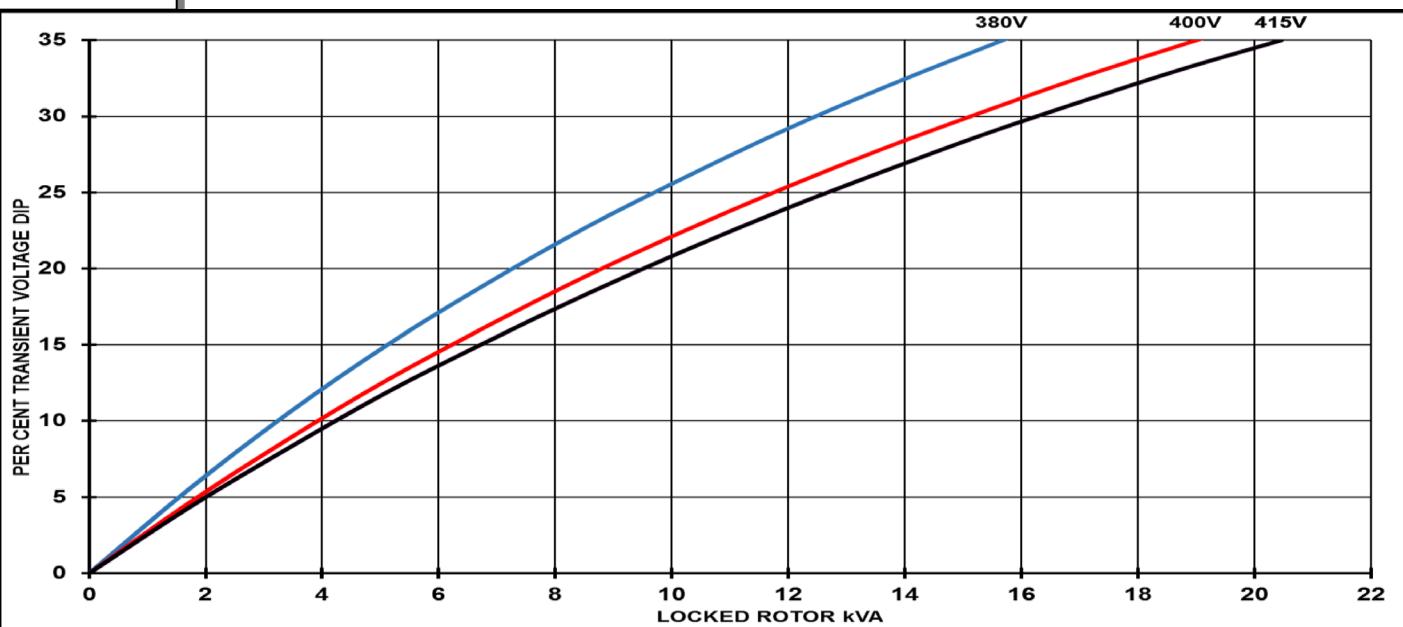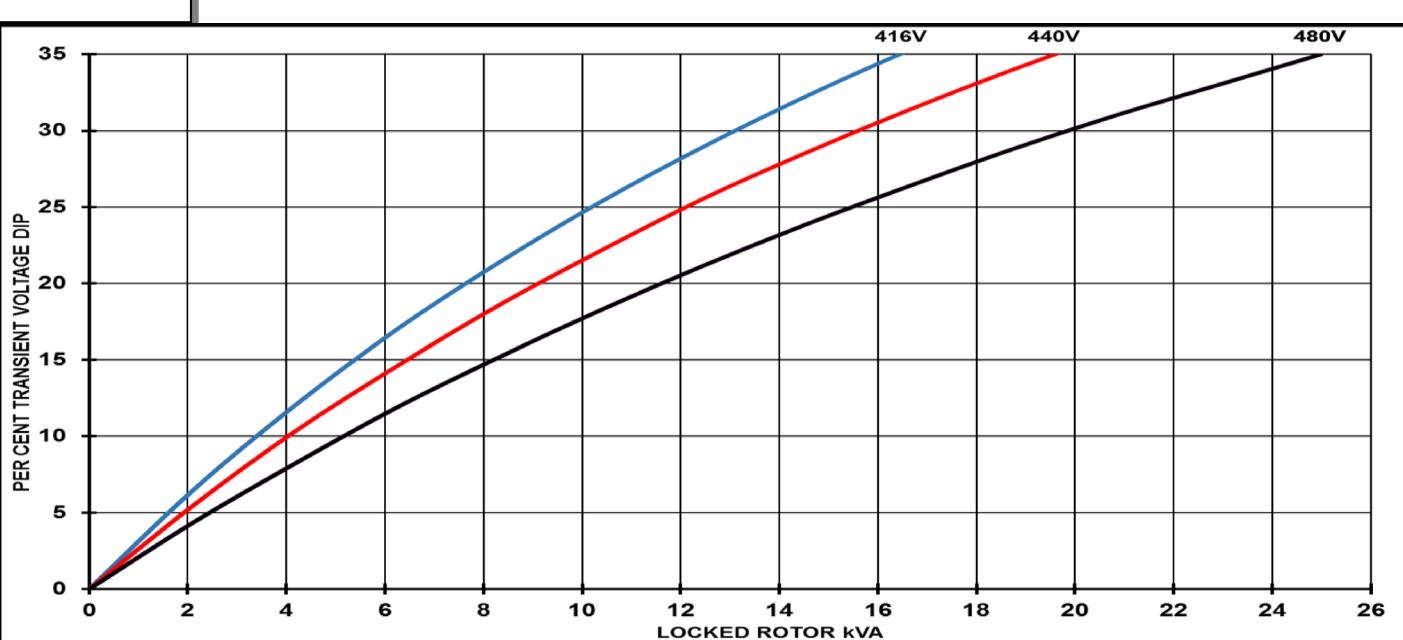Locked Rotor Motor Starting Curves**50Hz****60Hz**

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	
< 0.5	1.00	For voltage rise multiply voltage dip by 1.25
0.5	0.97	
0.6	0.93	

STAMFORD®
S0L1-P1 Winding 311
Three-phase Short Circuit Decrement Curve

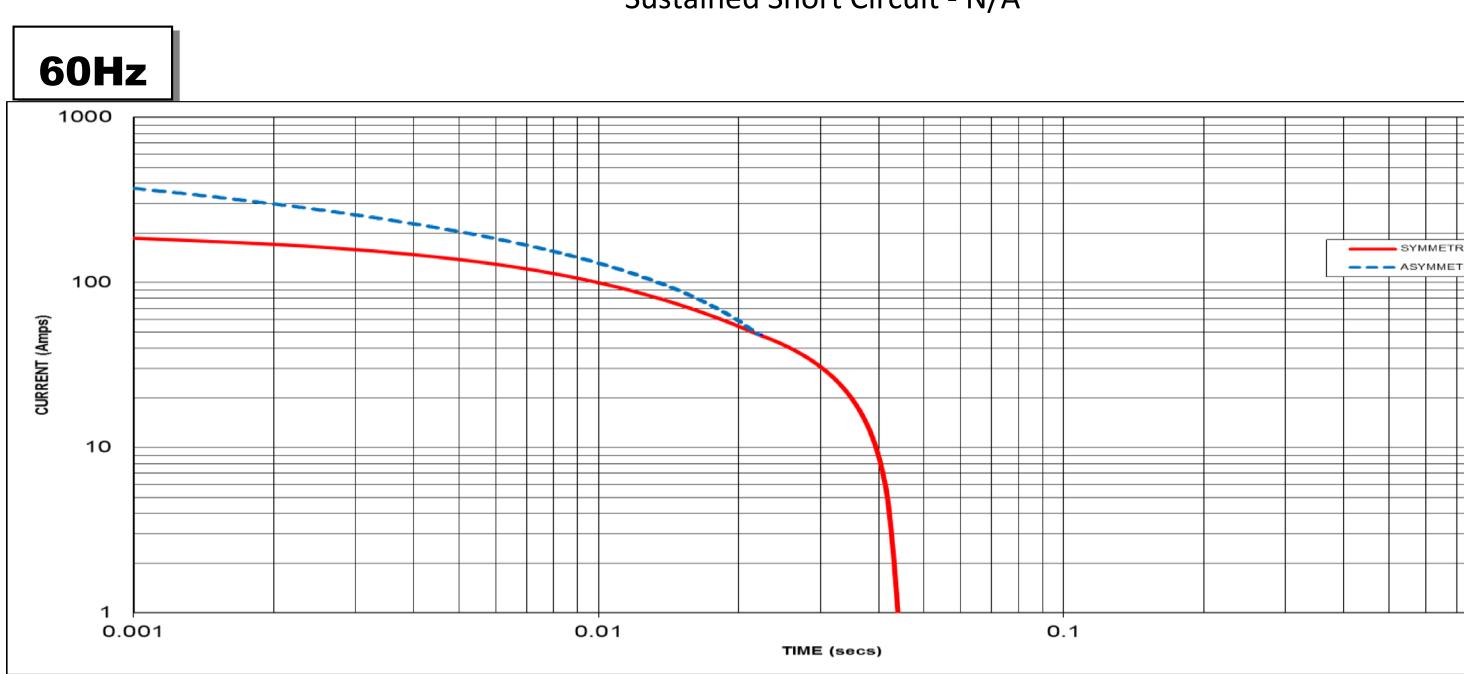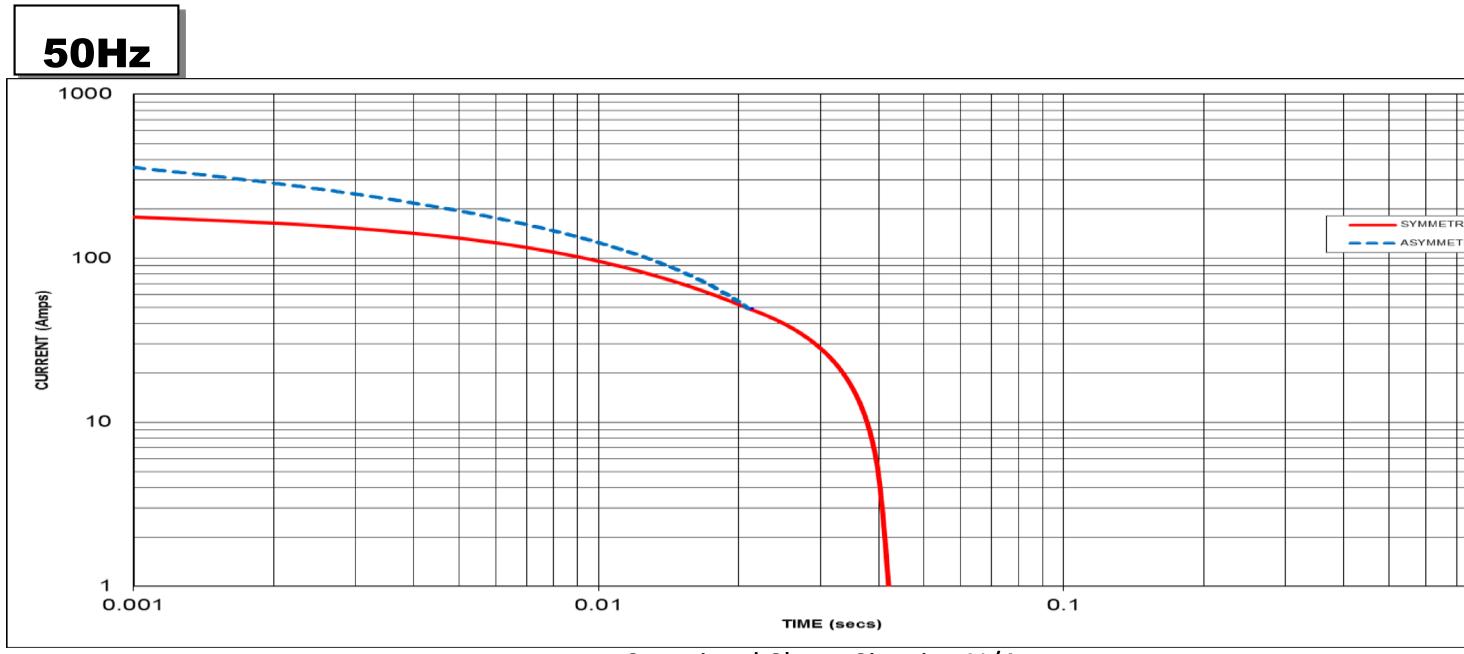

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

Note 2

The following multiplication factor should be used to adjust the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

50Hz	60Hz
------	------


3-phase	2-phase L-L	1-phase
---------	-------------	---------

STAMFORD®


SOL1-P1 Winding 311

Typical Alternator Operating Charts

400V/50Hz

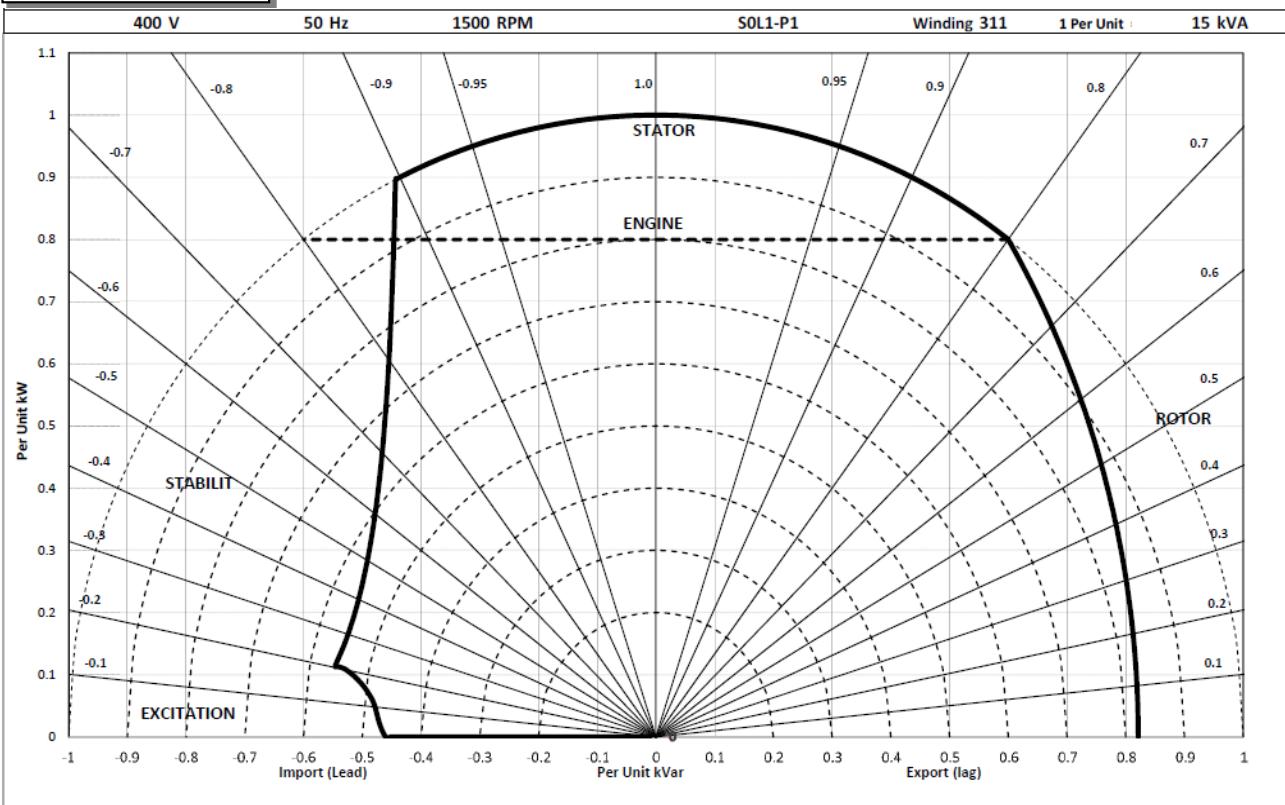

480V/60Hz

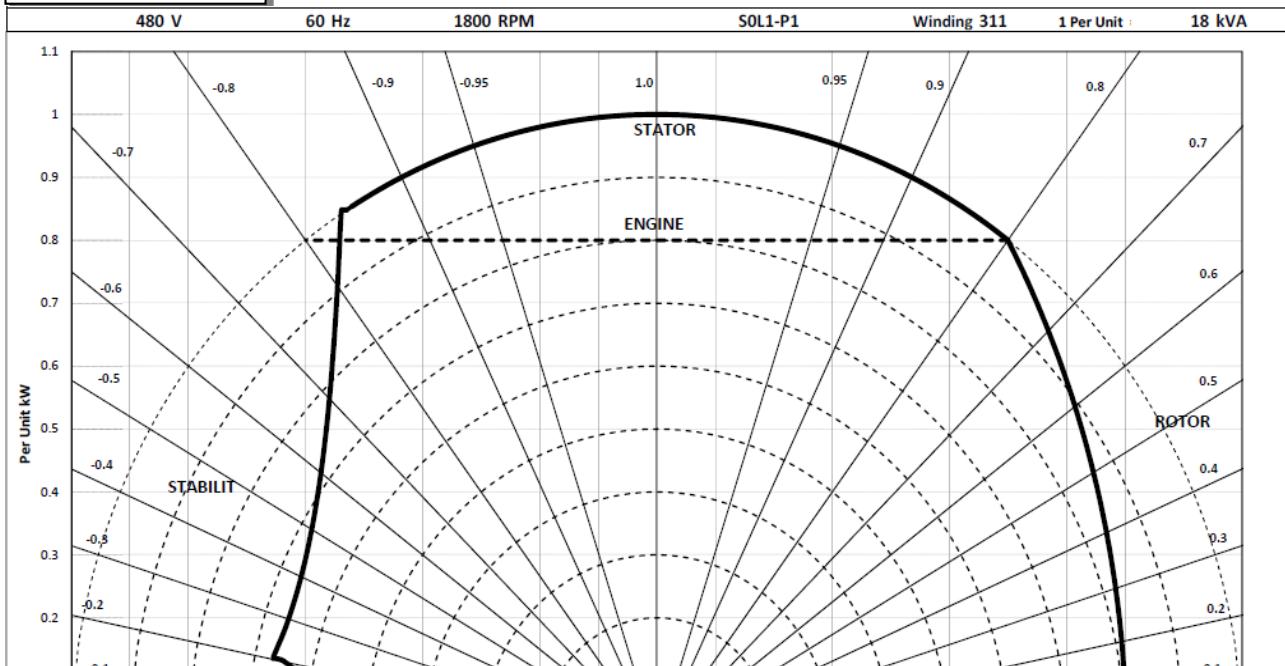

STAMFORD®

S0L1-P1 Winding 311

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C				Standby - 150/40°C				Cont. H - 125/40°C				Cont. F - 105/40°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	15.1	16.5	16.5	N/A	14.7	16.0	16.0	N/A	13.7	15.0	15.0	N/A	12.5	13.7	13.7	N/A
	kW	12.1	13.2	13.2	N/A	11.8	12.8	12.8	N/A	11.0	12.0	12.0	N/A	10.0	11.0	11.0	N/A
	Efficiency (%)	82.1	81.6	81.9	N/A	82.6	82.1	82.4	N/A	83.7	83.2	83.5	N/A	84.8	84.4	84.6	N/A
	kW Input	14.7	16.2	16.1	N/A	14.2	15.6	15.5	N/A	13.1	14.4	14.4	N/A	11.8	13.0	13.0	N/A
60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	17.4	18.5	N/A	19.8	16.9	18.0	N/A	19.2	15.8	16.8	N/A	18.0	14.4	15.3	N/A	16.4
	kW	13.9	14.8	N/A	15.8	13.5	14.4	N/A	15.4	12.6	13.4	N/A	14.4	11.5	12.2	N/A	13.4
	Efficiency (%)	82.7	82.6	N/A	82.6	83.1	83.0	N/A	83.1	84.1	84.0	N/A	84.1	85.0	85.0	N/A	85.0
	kW Input	16.8	17.9	N/A	19.2	16.3	17.3	N/A	18.5	15.0	16.0	N/A	17.1	13.6	14.4	N/A	15.4

De-Rates

All values tabulated above are subject to the following reductions:

- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

news.stamford-avk.com

For Applications Support:
applications@cummins.com