



Powered by: **FPT**  
POWERTRAIN TECHNOLOGIES

**C13 TE3X**  
13 Liter  
EPA Tier III

Specifications are subject to change without notice.

## Electrical Performance

Voltage	Phase	Frequency	Amperage(1)	kW	kVa	P.F.
120/208 Low Wye	Three	60 hz	1215	350	438	0.8
120/240 Delta	Three	60 hz	1051	350	438	0.8
277/480 High Wye	Three	60 hz	526	350	438	0.8


WINPOWER has over 85 years experience manufacturing industrial grade generators. Our mobile diesel units are built to handle standby and prime power applications. We are able to give customers the best long-term value by using high quality components with proven engineering designs. Every WINPOWER generator is manufactured in our Le Center, Minnesota facility.

## Generator Specifications

Rating	125/40°C (Standby)
Type	4 Pole - Revolving Field
Speed	1800 rpm
Insulation System	Class H
Connection	12 Lead
Stator Windings	Double Layer Concentric
Pitch	2/3
Harmonic Distortion	<5%
Efficiency Peak	~93.5%
Coupling	Flexible Disc
Bearing (Maintenance Free)	1
Automatic Voltage Regulation	(MX 341 standard) PMG +/- 1%

## Engine Specifications

Make	FPT
Model	C13 TE3X
Type	Diesel
Gross Horsepower-Standby	537 HP
Injection System	Direct E.U.I.
Speed Governor	Electronic
Cylinders	6
Total Displacement	13 L
Bore x Stroke (mm)	125 X 160
Aspiration	Turbocharged / Aftercooled
Total Cooling Capacity	17.7 gal
Lube Oil Spec	API CF-CH4, ACEA E3-E5
Fuel Spec	EN 590
Exhaust Outlet Size @ Muffler	5.0 in
Electrical System (Negative Ground)	24 VDC
Alternator	90 Amps
Battery (Not Included)	QTY 2 BCI 4D 1200 CCA

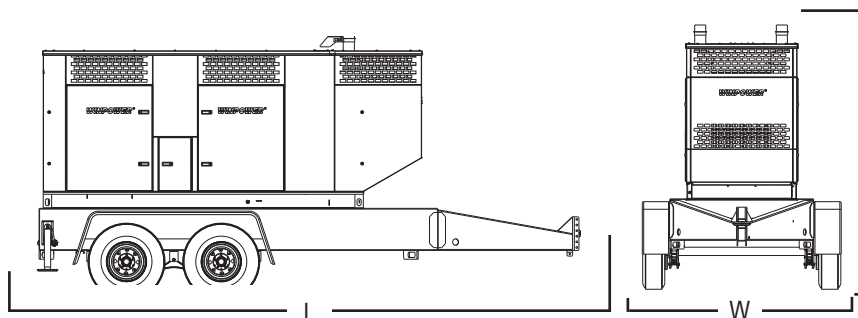

## Critical Dimensions (inches)

	L	W	H	LBS
Module w/ Trailer	244	85	128.5	10,900
Module w/out tank	181	62	86.5	8740

Dimensions subject to change

## Safety

At WINPOWER we take safety seriously. The DX350 is designed with numerous safety features that help to protect personnel and equipment.

- Adjustable circuit breaker for high and low voltage overcurrent protection
- Automatic shutdowns protect the terminal block connections from access during operation
- Automatic shutdown if an operator attempts to change voltages while the generator is operating
- Belts and pulleys are protected from unintentional access with guards
- Sophisticated electronic controls monitor engine and generator parameters to detect problems to warn operators and/or shut down the system

## Controller

- Digital control/instrument panel resets safety parameters automatically for the selected voltage
- Lead connections are easy to connect to terminal block
- DC power disconnect switch preserves the battery when the generator is not in use
- Front panel USB connection allows easy access for service
- Front panel voltage adjustment rheostat
- All engine and generator metering is digital
- Compatible with 2 wire start automatic transfer switch

## Receptacle Package


- 1200 Amp mainline circuit breaker
- 2x NEMA 5-20 GFCI duplex receptacles
- 2x 50A Twist-Lock (CS6369C) receptacles
- Full power terminal block
- Shore power allows the standard block heater and battery charger to be powered with a standard extension cord

## Trailer Features

- DOT approved diesel 600 gallon, single wall tank and trailer
- 18,000 lbs GVWR with electric brakes
- 3" pintle coupler included standard
- Couplers are bolt on allowing the operator to quickly change devices and adjust the coupler height to better accommodate a variety of tow vehicles
- Front and rear stabilizing jacks included standard
- Optional spare tire and steel tool box available
- Tire Size: 225/75 15

## Selector Switch Features

- 3 Position: 120/208 3-PH Low-Wye, 120/240 3-PH delta (120/240 1-PH is available using two poles excluding wild leg), 277/480 3-PH High-Wye

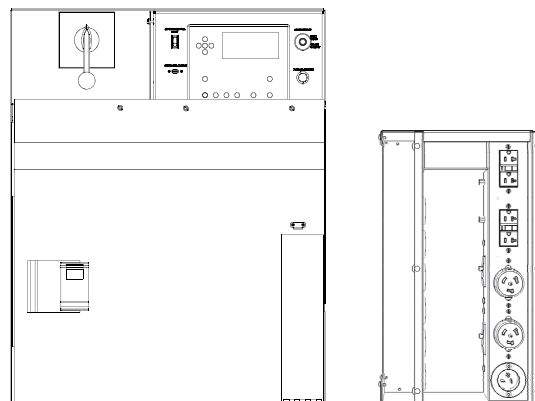

## Derating Factors

- Temperature > 104° F: 3% per 10° F
- Altitude > 1000 ft: 3% per 1000 ft
- Prime Power: 10%
- Max Operating Temp: 50°C/122°F

## Warranty

WINPOWER warrants its products to be free from defects in material and workmanship for one year or 1000 hours. The engine warranty is administered through FPT'S service network for one year unlimited hours.

## Accessories and Options

- 10A battery charger (standard)
- 2250 watt block heater (standard)
- Two wire start (standard)
- 600 gallon single wall fuel tank (standard)
- 3" Pintle (standard)
- 2x 50 amp twist-lock plug (standard)
- Spare tire
- Tool box
- DSE 890 communication package with GSM & GPS antennas

Fuel Consumption	
100% Load	24.50 Gallons/Hr.
80% Load	21.75 Gallons/Hr.
50% Load	14.35 Gallons/Hr.