


WL22000VE-03/A

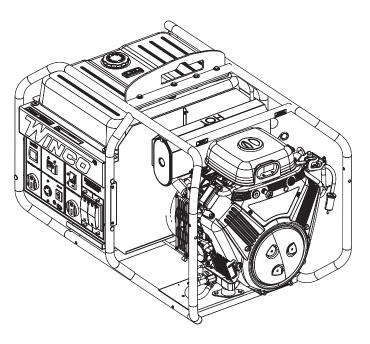

Designed, engineered, and manufactured in our facility located in Le Center, Minnesota, equipped with modern engineering, fabrication and assembly capabilities.

Rugged Design

Engineered and built tough with powder coat paint galvanealed steel.

Full Load Tested

Every generator is 100% load tested in-house.

Briggs & Stratton Commercial Engine

Premium-grade Vanguard engines are application-engineered to power equipment that works for a living.






VOLTAGE	STARTING WATTS	STARTING AMPS @ 240V	RUNNING WATTS	RUNNING AMPS @ 120V	RUNNING AMPS @ 240V
120/240 1-PH	22,000	91.6	19,000	158.3	79.2
			0.40V/DECEDTACI	EC.	(4)NIENANI / OO OON

MOTOR STARTING (CODE G)	6 HP
DBA @ 7 METERS FULL LOAD	79
TOTAL HARMONIC DISTORTION	< 6%
MAIN CIRCUIT BREAKER	(2) 40A, 240V (GFCI)
BONDED NEUTRAL	YES
120V RECEPTACLES	(2) NEMA 5-20 20A (DUPLEX GFCI)
120/240V RECEPTACLES	(2) 14-50 50A (GFCI)

240V RECEPTACLES	(1)NEMA L6-30 30A (GFCI)
PROTECTIVE ROLL FRAME	1.25" DIA 14 GA STEEL
ASSEMBLED IN	USA
EPA APPROVED	YES
CARB APPROVED	NO
TÜV CERTIFICATION	NO
UNIT WARRANTY ⁽¹⁾	3 YEARS COMMERCIAL

RECEPTACLE PANEL





ENGINE

ENGINE BRAND	BRIGGS & STRATTON
ENGINE MODEL	VANGUARD 6134
ENGINE STARTER	ELECTRIC
ENGINE SPEED	3600 RPM
ENGINE CYLINDERS	V-TWIN
ENGINE HP	40
FREQUENCY	60 HZ
IGNITION SYSTEM	MAGNETRON® ELECTRONIC

LUBRICATION	FULL-PRESSURE
BORE/STROKE	85.5 mm x 86.5 mm
DISPLACEMENT/TYPE	993CC/ OHV
LOW OIL PROTECTION	STANDARD
RECOMMENDED OIL ⁽²⁾	5W-30 SAE
OIL CAPACITY	2.6 QT
COMPRESSION RATIO	8.5:1

FUEL

FUELTANK	15 GAL
FULL LOAD RUN TIME	4.5 HRS
FUEL GAUGE	YES

3.28 GAL/HR
2.57 GAL/HR
1.88 GAL/HR
0.95 GAL/HR


GENERATOR END

GENERATOR END BRAND	MECC ALTE
GENERATOR END MODEL	AME3
PHASE	SINGLE
VOLTAGE REGULATION	CAPACITOR +/- 5%
TEMPERATURE RISE	125/40°C
BRUSH	YES
SPEED	3600 RPM

STATOR	2/3 PITCH
WINDINGS	100% COPPER
STATOR WINDING	DOUBLE LAYER CONCENTRIC
BEARINGS	SINGLE (MAINTENANCE FREE)
EFFICIENCY PEAK	70.4%
INSULATION	CLASS H
INGRESS PROTECTION	IP23

SHIPPING

SHIPPING DIMENSIONS (LxWxH)	43.5" x 31" x 37"
SHIP WEIGHT	504 LBS
FREIGHT CLASS	70





OPTIONAL ACCESSORIES

COVER	45" x 32" x 30"
MAINTENANCE KIT	16200-011
BATTERY	BCI GROUP 26 500 CCA
4-WHEEL DOLLY KIT	16199-040
L6-30 PLUG	64697-000
50A PLUG	97360-002

NOTES:

 $\begin{tabular}{ll} \end{tabular} \begin{tabular}{ll} \end{tabular} \beg$

(2) The recommended oil is for normal applications.

See operator's manual for more oil recommendations. Specifications are subject to change without notice.



Sales: 507-357-6821 Service: 507-357-6831

